




User Guide

1200W High Power DC-DC Boost Converter

20A 1200W DC-DC Step Up Converter Module. Constant Current (CC) and Constant Voltage (CV) control with input reverse/under voltage protection.

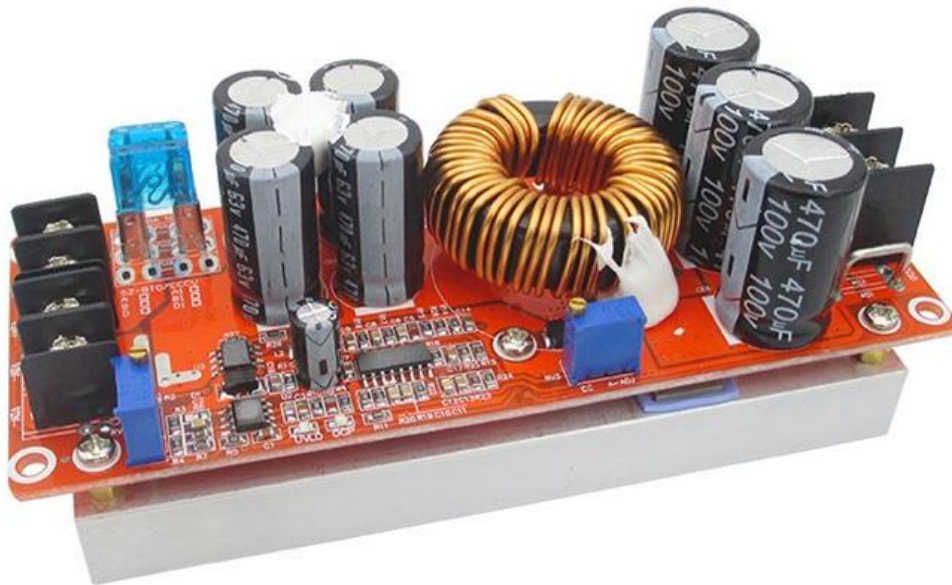


SKU: [MDU-1047](#)

Brief Data:

- Input voltage: 10-60VDC.
- Input Current: 20A.
- Output voltage: 12-80VDC continuously adjustable.
- Output Current: 20A MAX. If over 10A add ventilation fan for heat dissipation.
- Constant Current Range: 0.5-20A.
- Switching frequency: 150KHz.
- Conversion efficiency: 92%~ 97%.
- Over current protection.
- Input reverse/under voltage circuit protection with 150A MOSFET.
- If the constant current mode is used to set the voltage, the constant voltage must be higher than the input voltage. Do not use the method of short circuit output to adjust the output current, the module design of the boost converter cannot be adjusted in short circuit method.
- Module dimensions: 116x52x15mm (L x W x H).
- Weight: 260 grams.

Functional Block Diagram:

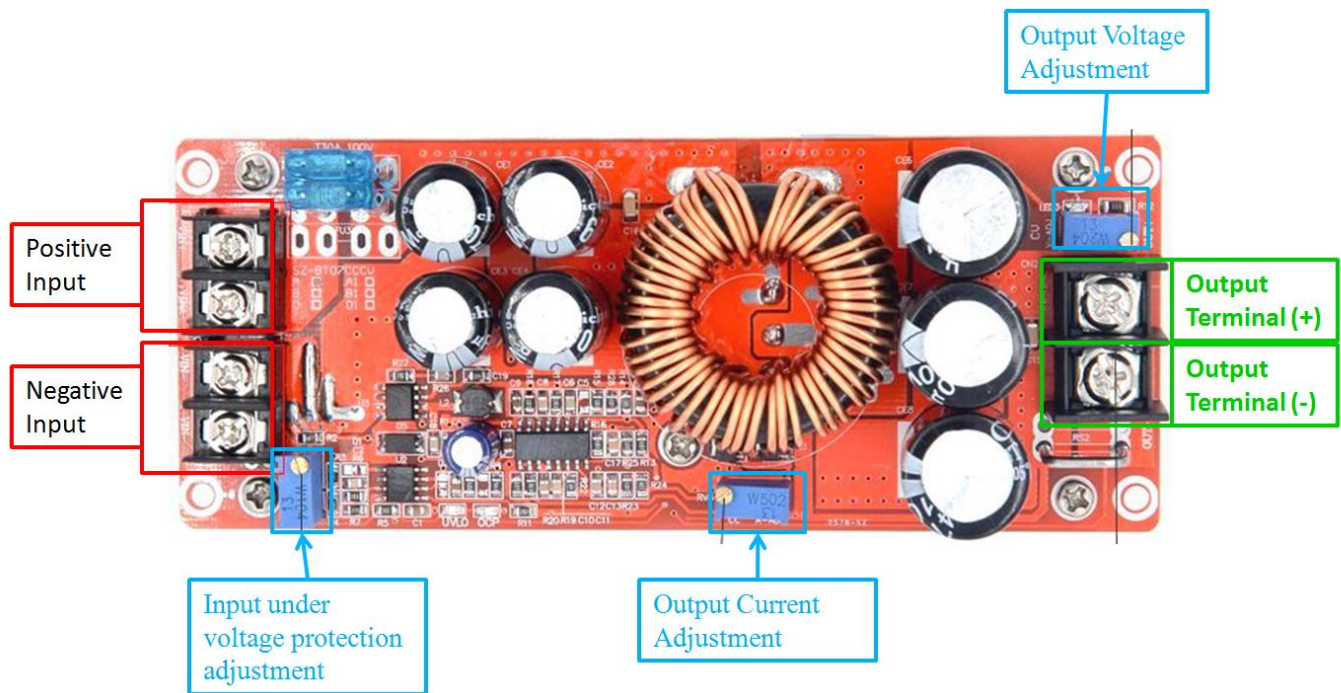

Application Examples:

1. Mounted with Ventilation Fan for output current more than 10A.

