



DONGGUAN NANJING ELECTRONICS LTD.,
TO-92 Encapsulate Three-terminal Voltage Regulator

CJ78L05 Three-terminal positive voltage regulator

FEATURES

Maximum Output Current I_O : 0.1 A

Output Voltage V_O : 5 V

Continuous Total Dissipation


P_D : 0.625W ($T_a=25^\circ\text{C}$)

TO-92

1. OUT

2. GND

3. IN




ABSOLUTE MAXIMUM RATINGS (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Value	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	0~+150	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-55~+150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS AT SPECIFIED VIRTUAL JUNCTION TEMPERATURE ($V_I=10\text{V}$, $I_O=40\text{mA}$, $C_i=0.33\mu\text{F}$, $C_o=0.1\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Test conditions		Min	Typ	Max	Unit
Output voltage	V_O		25 $^\circ\text{C}$	4.8	5.0	5.2	V
		7V $\leq V_I \leq 20\text{V}$, $I_O=1\text{mA} \sim 40\text{mA}$	0-125 $^\circ\text{C}$	4.75	5.0	5.25	V
		$I_O=1\text{mA} \sim 70\text{mA}$		4.75	5.0	5.25	V
Load Regulation	ΔV_O	$I_O=1\text{mA} \sim 100\text{mA}$	25 $^\circ\text{C}$		15	60	mV
		$I_O=1\text{mA} \sim 40\text{mA}$	25 $^\circ\text{C}$		8	30	mV
Line regulation	ΔV_O	7V $\leq V_I \leq 20\text{V}$			32	150	mV
		8V $\leq V_I \leq 20\text{V}$	25 $^\circ\text{C}$		26	100	mV
Quiescent Current	I_q		25 $^\circ\text{C}$		3.8	6	mA
Quiescent Current Change	ΔI_q	8V $\leq V_I \leq 20\text{V}$	0-125 $^\circ\text{C}$			1.5	mA
	ΔI_q	1mA $\leq V_I \leq 40\text{mA}$	0-125 $^\circ\text{C}$			0.1	mA
Output Noise Voltage	V_N	10Hz $\leq f \leq 100\text{KHz}$	25 $^\circ\text{C}$		42		μV
Ripple Rejection	RR	8V $\leq V_I \leq 20\text{V}$, $f=120\text{Hz}$	0-125 $^\circ\text{C}$	41	49		dB
Dropout Voltage	V_d		25 $^\circ\text{C}$		1.7		V

TYPICAL APPLICATION

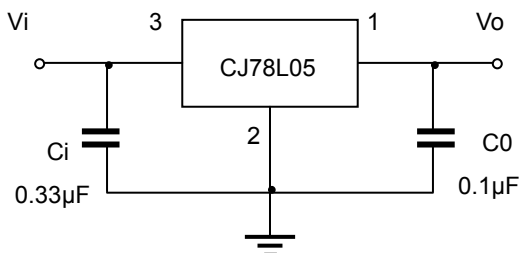

Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as Possible to the regulators.

Typical Characteristics

CJ78L05

